


15W Series Wall Mount Switching Power Supply




Model	Input	Output
GFP151U Series GFP151T Series GFP151K Series  Meets Efficiency level V regulations	AC90V~264V	3V/2.5A
		3.3V/2.5A
		5V/2.5A
		6V/2.3A
		9V/1.6A
		10V/1.5A
		12V/1.25A
		15V/1A

Safety
UL/CUL, PSE, GS, BS, CE, CB, FCC, SAA, CCC

Input /Output Specification				
ITEM	SPECIFICATION	MIN	TYP.	MAX
Input Voltage	Single Phase (Unit: VAC)	100		240
Input Voltage Range	Single Phase (Unit: VAC)	90		264
Input Frequency	Single Phase (Unit: Hz)	47	50/60	63
Input Current	Typical Input Voltage & Output at Full Road (Unit: mA)			350
Ac Inrush Current	Typical Input Voltage & Output at Full Road, 25°C			30A
Efficiency	Typical Input Voltage & Output at Full Road	74%		
Output Power	15W			
Output Voltage	3V-15V			

Over Voltage Protection	120%min			
Over Current Protection	120%min			
Short Protection	Auto Recovery			
Load Regulation	±5%			
General Specification				
Operating Temp	0°C~40°C			
Storage Temp	-20°~85°C			
Operating Relative Humidity	5~95%RH			
WithStanding Voltage	AC 3000V(Min), 5mA(Max)			
Insulation Resistance	DC 500V 100MΩ(Min)			

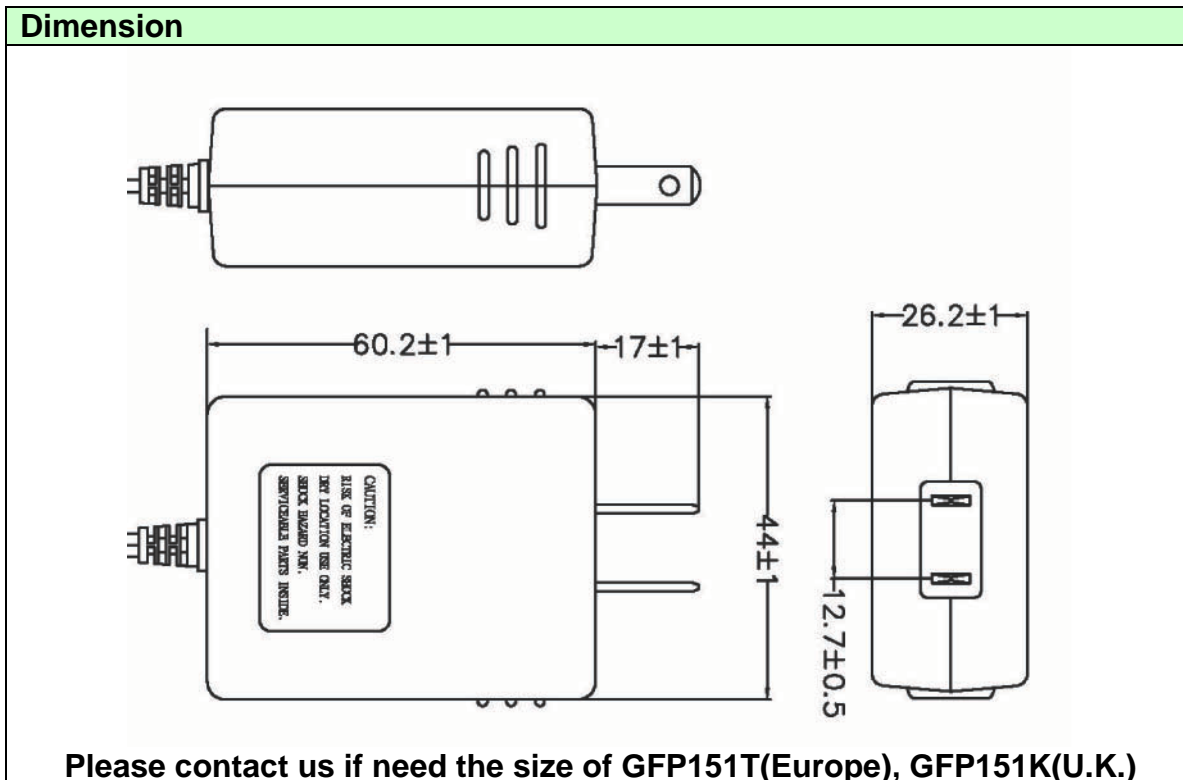

North America Office:
L.Q.P. Enterprises Co., Ltd.
 175-5489 Byrne Road,
 Burnaby, B.C. V5J 3J1 Canada
 TEL: (604)451-7899 FAX: (604)451-7858
www.LeadingQP.com www.LQP.ca