


## 18W Series Wall Mount Switching Power Supply



Model	Input	Output
GFP181U Series GFP181T Series GFP181K Series  Meets CEC (California Energy Commission) requirements	AC90V~264V	3V/3A
		3.3V/3A
		5V/3A
		6V/2.8A
		9V/2A
		10V/1.8A
		12V/1.5A
		15V/1.2A
		24V/0.75A


### Safety

UL/CUL, PSE, GS, BS, CE, CB, FCC, SAA, CCC

### Input /Output Specification

ITEM	SPECIFICATION	MIN	TYP.	MAX
Input Voltage	Single Phase (Unit: VAC)	100		240
Input Voltage Range	Single Phase (Unit: VAC)	90		264
Input Frequency	Single Phase (Unit: Hz)	47	50/60	63
Input Current	Typical Input Voltage & Output at Full Road (Unit: mA)			350
Ac Inrush Current	Typical Input Voltage & Output at Full Road, 25°C			30A
Efficiency	Typical Input Voltage & Output at Full Road	76%		
Output Power	18W			
Output Voltage	3V-24V			
Over Voltage Protection	120%min			
Over Current Protection	120%min			

Short Protection	Auto Recovery			
Load Regulation	±5%			
<b>General Specification</b>				
Operating Temp	0°C~40°C			
Storage Temp	-20°~85°C			
Operating Relative Humidity	5~95%RH			
WithStanding Voltage	AC 3000V(Min), 5mA(Max)			
Insulation Resistance	DC 500V 100MΩ(Min)			

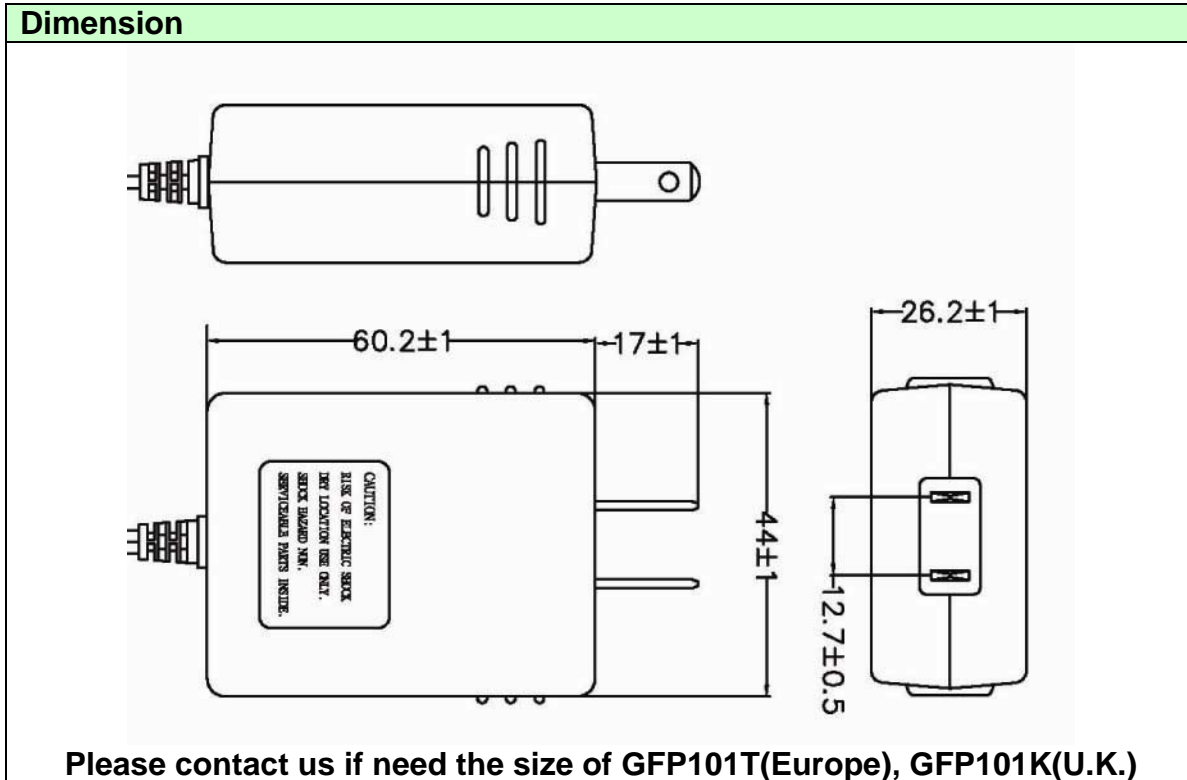

North America Office:  
**L.Q.P. Enterprises Co., LTD.**  
 175-5489 Byrne Road,  
 Burnaby, B.C. V5J 3J1 Canada  
 TEL: (604)451-7899 FAX: (604)451-7858  
 www.LeadingQP.com, www.LQP.ca