


24W Series Wall Mount Universal Switching Power Supply

GFP241 Series Power Supply with Interchangeable Plug



Model	Input	Output
GFP241 Series  Efficiency Level V Regulations	AC90V~264V	5V/4A
		6V/3.8A
		9V/2.6A
		10V/2.4A
		12V/2A
		15V/1.6A
		24V/1A

Safety


UL/CUL, CE, TUV/GS, FCC

Input /Output Specification

ITEM	SPECIFICATION	MIN	TYP.	MAX
Input Voltage	Single Phase (Unit: VAC)	100		240
Input Voltage Range	Single Phase (Unit: VAC)	90		264
Input Frequency	Single Phase (Unit: Hz)	47	50/60	63
Input Current	Typical Input Voltage & Output at Full Road (Unit: mA)			550
Ac Inrush Current	Typical Input Voltage & Output at Full Road, 25°C			30A
Efficiency	Typical Input Voltage & Output at Full Road	79%		
Output Power	24W			
Output Voltage	5V-24V			
Over Voltage Protection	120%min			
Over Current Protection	120%min			
Short Protection	Auto Recovery			

Load Regulation	±5%			
General Specification				
Operating Temp	0°C~40°C			
Storage Temp	-20°~85°C			
Operating Relative Humidity	5~95%RH			
WithStanding Voltage	AC 3000V(Min), 5mA(Max)			
Insulation Resistance	DC 500V 100MΩ(Min)			

Dimensions

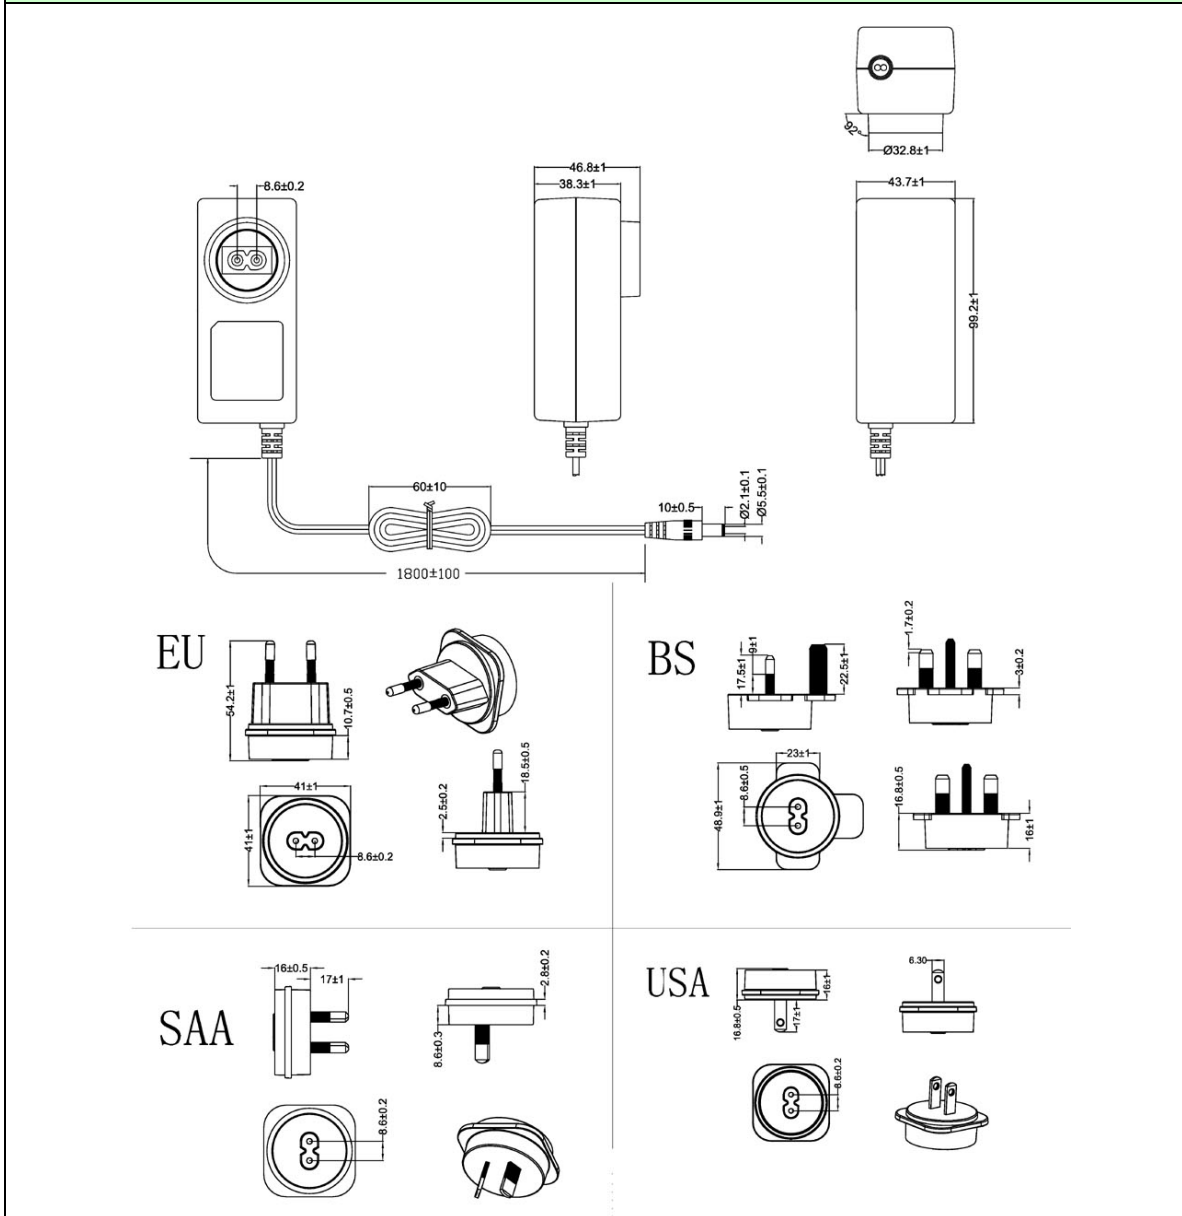

North America Office:
L.Q.P. Enterprises Co., LTD.
 175-5489 Byrne Road,
 Burnaby, B.C. V5J 3J1 Canada
 TEL: (604)451-7899 FAX: (604)451-7858
 www.LeadingQP.com, www.LQP.ca