



## 5W Series Wall Mount Switching Power Supply

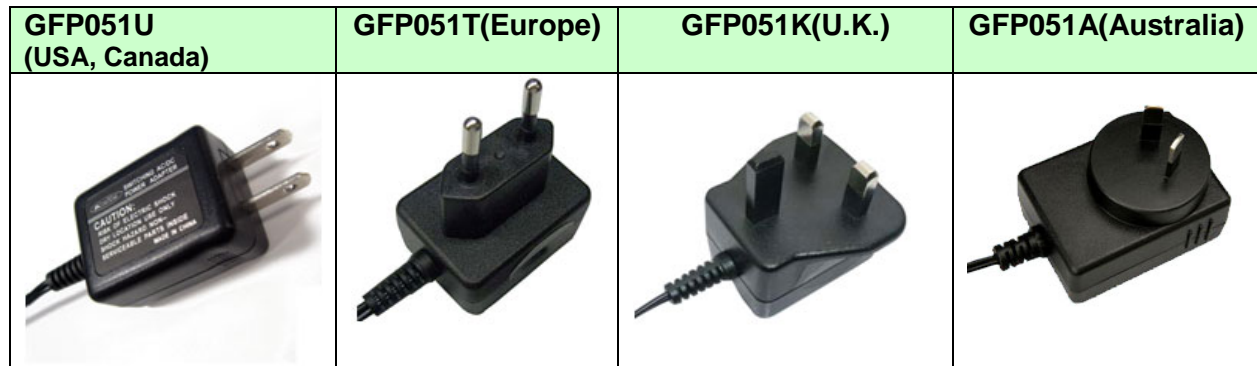

Model	Input	Output
GFP051U Series GFP051T Series GFP051K Series GFP051A Series  Efficiency Level V Regulations	AC90V~264V	3V/1.5A, 2A
		3.3V/1.5A, 2A
		3.6V/1.5A
		4.2V/0.8A, 1.2A
		4.5V/0.5A, 1A
		5V/0.5A, 1A
		6V/0.5A, 1A
		7.5V/0.8A
		9V/0.65A
		12V/0.5A
		15V/0.4A
		24V/0.25A

Safety
UL/CUL, PSE, BSMI, FCC, CCC, TUV/GS, CE, SAA, C-TICK


Input /Output Specification				
ITEM	SPECIFICATION	MIN	TYP.	MAX
Input Voltage	Single Phase (Unit: VAC)	100		240
Input Voltage Range	Single Phase (Unit: VAC)	90		264
Input Frequency	Single Phase (Unit: Hz)	47	50/60	63
Input Current	Typical Input Voltage & Output at Full Road (Unit: mA)			350
Ac Inrush Current	Typical Input Voltage & Output at Full Road, 25°C			30A
Efficiency	Typical Input Voltage & Output at Full Road	75%		
Output Power	5W			
Output Voltage	3V-24V			

Over Voltage Protection	120%min			
Over Current Protection	120%min			
Short Protection	Auto Recovery			
Load Regulation	±5%			

### General Specification

Operating Temp	0°C~40°C
Storage Temp	-20°~85°C
Operating Relative Humidity	5~95%RH
WithStanding Voltage	AC 3000V(Min), 5mA(Max)
Insulation Resistance	DC 500V 100MΩ(Min)

### Dimension

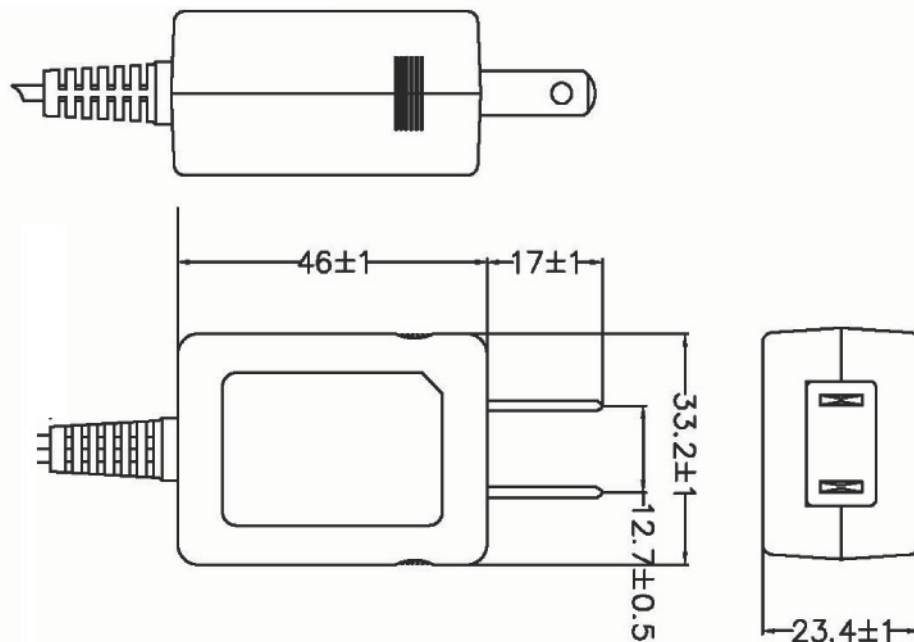

Please contact us if need the size of **GFP051T(Europe)**, **GFP051K(U.K.)**, or **GFP051A (Australia)**

North America Office:  
**L.Q.P. Enterprises Co., Ltd.**  
 175-5489 Byrne Road,  
 Burnaby, B.C. V5J 3J1 Canada  
 TEL: (604)451-7899 FAX: (604)451-7858  
[www.LeadingQP.com](http://www.LeadingQP.com)