

## 6W SERIES



**RoHS Compliant** and has met **Efficiency Level IV** Regulations

## Wall Mount Power Supply with Interchangeable AC plugs

- ✓ Wide Input Voltage 90 to 264 VAC, 47 to 63 Hz
- ✓ Output Voltage Available From 3VDC Thru 24VDC
- ✓ Low Ripple & Noise
- ✓ Class II Insulation
- ✓ No minimum load requirement
- ✓ 1 Year Warranty

**Safety Approvals: UL, c-UL, GS, GB, CE, CS, FCC**

### Single Output

Model Number	Output Voltage	Max. Output Power	Additional Safety
3A-061WP03	3 ~ 4 VDC	6W	
3A-061WP05	4 ~ 6 VDC	6W	Efficiency Level IV
3A-061WP12	9 ~ 12 VDC	6W	Efficiency Level IV
3A-061WP18	15 ~ 18 VDC	6W	Efficiency Level IV
3A-061WP24	20 ~ 24 VDC	6W	Efficiency Level IV
3A-051WP05	5.0 ~ 5.2 VDC	6W	PSB, DOIR, CCC, IV

### Electrical Characteristics

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage	Universal Full Range	90		264	VAC
Input Frequency		47		63	Hz
Output Power Range	Vin=90 to 264VAC	0		6	W
Output Voltage Range		See voltage chart			V
Input Current				300	mA
Leakage Current				<0.25	mA
Start Up Time	Minimum AC Input			<1000	mS
Hold-Up Time	230VAC, 50 Hz	>20			mS
Rise Time				<100	mS
Cooling	Natural Cooling				


### Conditions

Parameter	Min.	Max.	Unit
Operating Temperature	0	40	°C
Storage Temperature	-10	75	°C
Operating Humidity	20	85	%
Storage Humidity	10	95	%
Mean Time Between Failures	50		K Hrs

### Approvals and Compliances

Spec.	Description
Approvals	UL60950-1, CSA C22.2 No. 60950-1, EN 60950-1, IEC 60950-1
EMI	FCC CFR 47 PART 15, EN55022, EN61000-3
EMS	EN 55024 (EN61204-3), EN61000-4
Environ.	RoHS

### Mechanical Layout

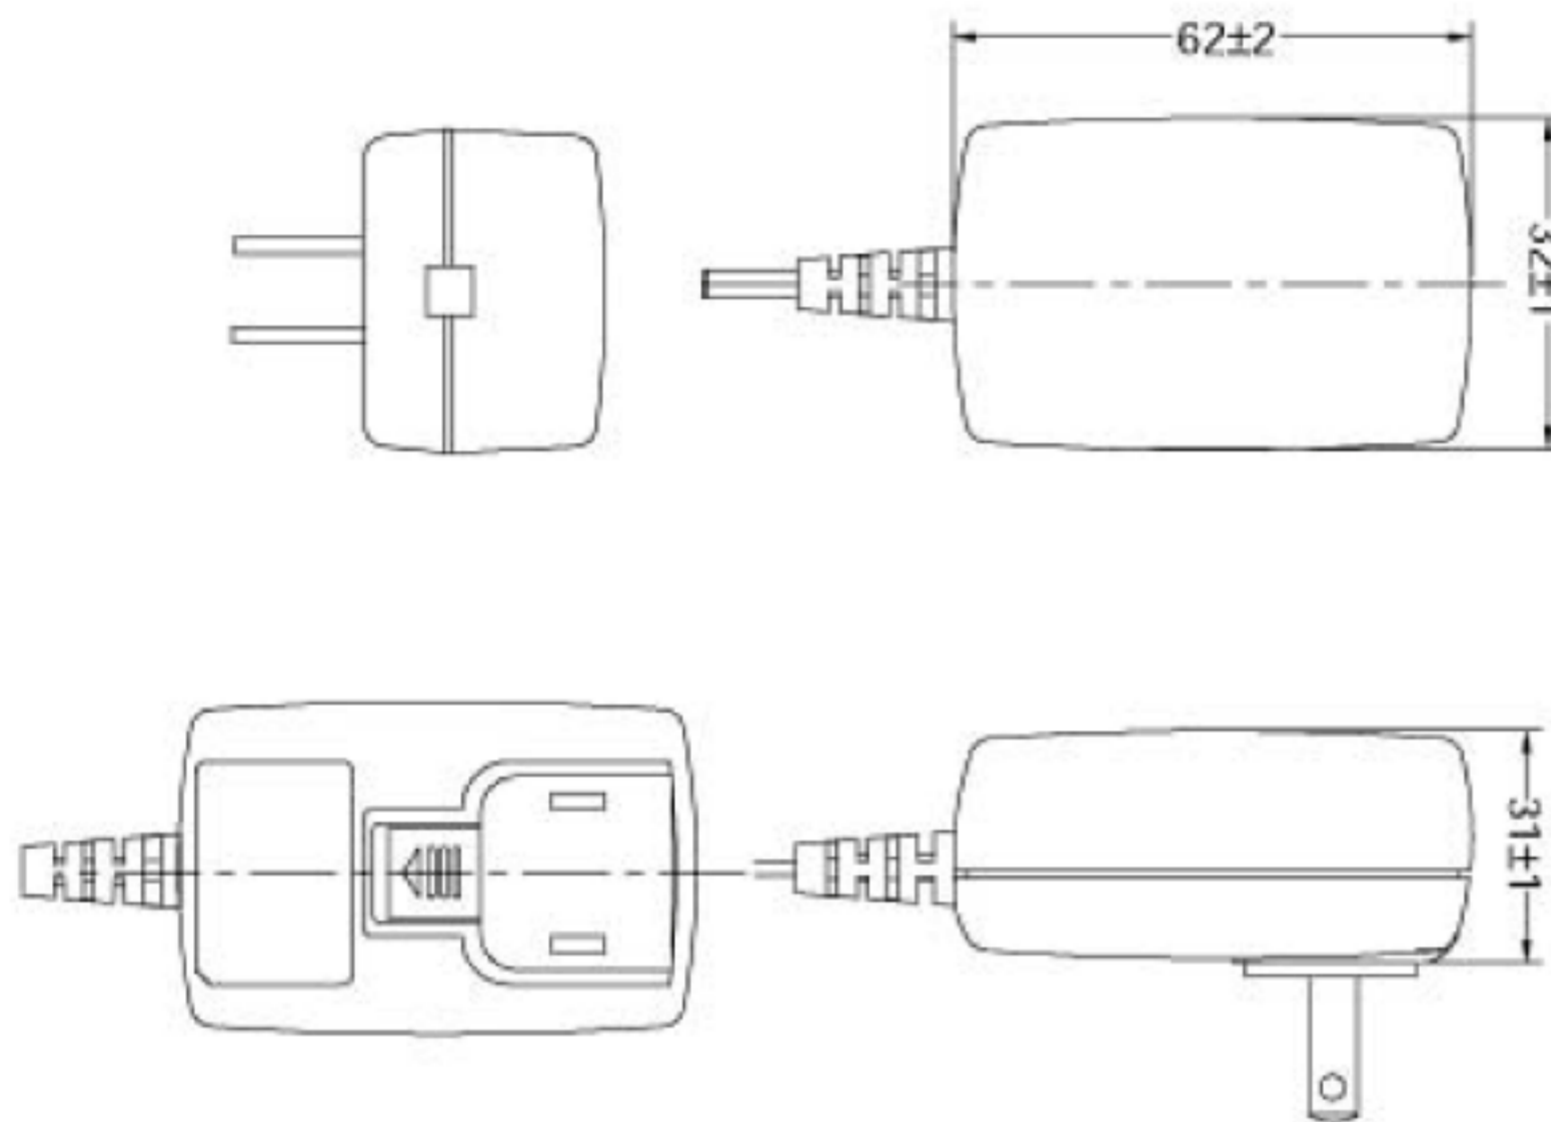

North America Office:  
**L.Q.P. Enterprises Co., LTD.**  
175-5489 Byrne Road,  
Burnaby, B.C. V5J 3J1 Canada  
TEL: (604)451-7899 FAX: (604)451-7858  
[www.LeadingQP.com](http://www.LeadingQP.com), [www.LQP.ca](http://www.LQP.ca)