

文件编号:


产品规格书

版本/次: A/0

REV	DATE	REASON
B	JUL.13.06	Change terminal and housing P/N.

客户: **DPL**

PRODUCTION DRAWING

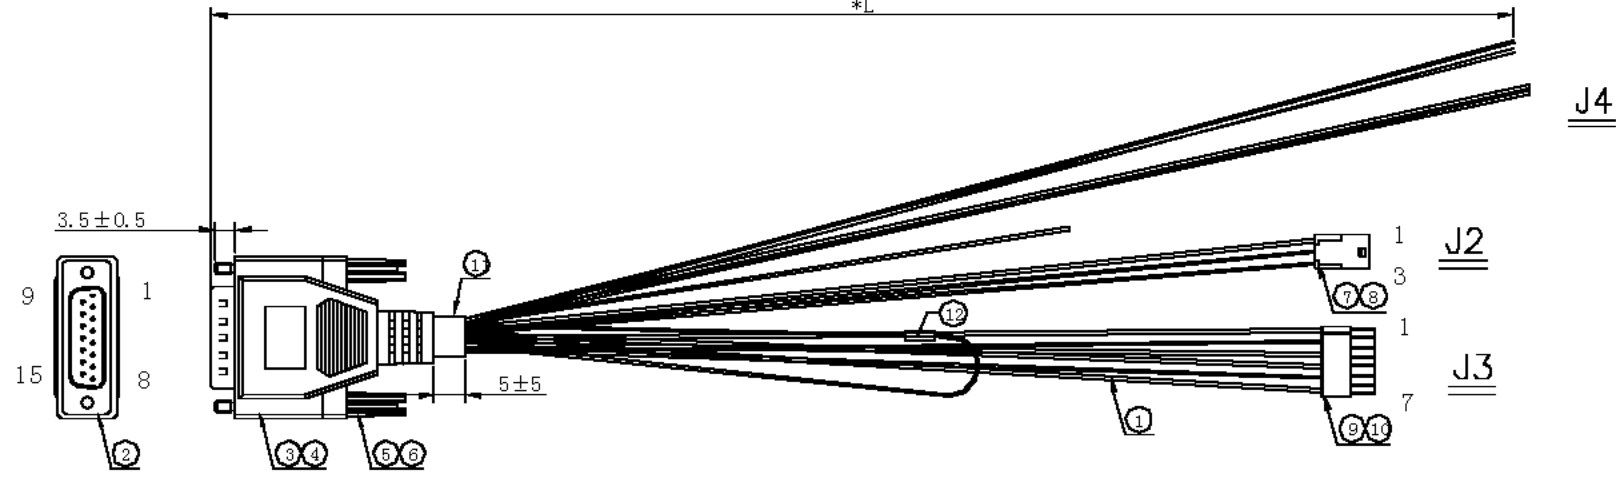

WIRE LIST:

J1	COLOR	J2	J3	J4	*L
1	BLACK	→	→	CUT	2000
		→	→	CUT	2000
		→	3	///	600
		→	3	///	600
		→	→	CUT	900
2	WHITE/ORANGE	→	5	///	600
5	ORANGE	→	2	///	600
6	BROWN	→	4	///	600
8	YELLOW	→	1	///	600
9	GRAY	→	→	CUT	2000
10	WHITE/BLACK	→	6	///	600
11	GREEN	→	→	CUT	2000
12	RED	→	1	///	600
13	WHITE	→	2	///	600
14	PURPLE	→	→	→	450
15	BLUE	→	7	///	600

SHORT

NO.	DESCRIPTION	Q'TY	REMARK
12	H.S.TUBE OD:2.0 UL BLACK L=20mm	1PC	
11	H.S TUBE OD:10.0 UL BLACK L=40mm	1PC	
10	TERMINAL CUSTOMER P/N: 30.30T1-LF	7PCS	CUSTOMER
9	HOUSING CUSTOMER P/N: 30.25-07S	1PC	CUSTOMER
8	TERMINAL CUSTOMER P/N: 30.31T2-LF	3PCS	CUSTOMER
7	HOUSING CUSTOMER P/N: 30.20-03S	1PC	CUSTOMER
6	SCREW MOLD T-3120 PVC EY-11#(BLACK) 15P		
5	SCREW #4-40 UNC 4*47mm NICKEL PLATED	2PCS	
4	OUTER MOLD T-1234 PVC EY-11#(BLACK) 45P		
3	INNER MOLD T-2235 PE EY-12#		
2	DB 15M INSU:BLACK SHELL NICKEL PLATED	1PC	
1	CABLE UL1569 22AWG WIRE TINED COPPER PVC COLOR:LOOK WIRE LIST	Look WIRE LIST	

NOTE:
1. UNIT:mm
2. TEST:

- EACH CONDUCTOR MUST PASS CONTINUITY TEST AND SHORT,OPEN, INTERMITTENT, MISWIRING SITUATION OCCUR IS NOT PERMITTED.
- THE INSULATION RESISTANCE BETWEEN EACH CONDUCTORS IS 2M OHM MIN
- WITH RoHS Compliant

3RD ANGLE PROJECTION	SIGNATURE	DATE	L.Q.P. Enterprises Co. LTD	
TOLERANCES DIM: ±5 ANGLE:5°	DRAWN BY: 华文强	07-13-06	P/N: CAB 400-ATM	
	CHECK BY:		SCALE:1:1.5	UNIT:MM
	BDD APPD.		REV.:A/0	SHEET 1 OF 1