


文件编号: _____

产品规格书

版本/次: A/0

PRODUCTION DRAWING

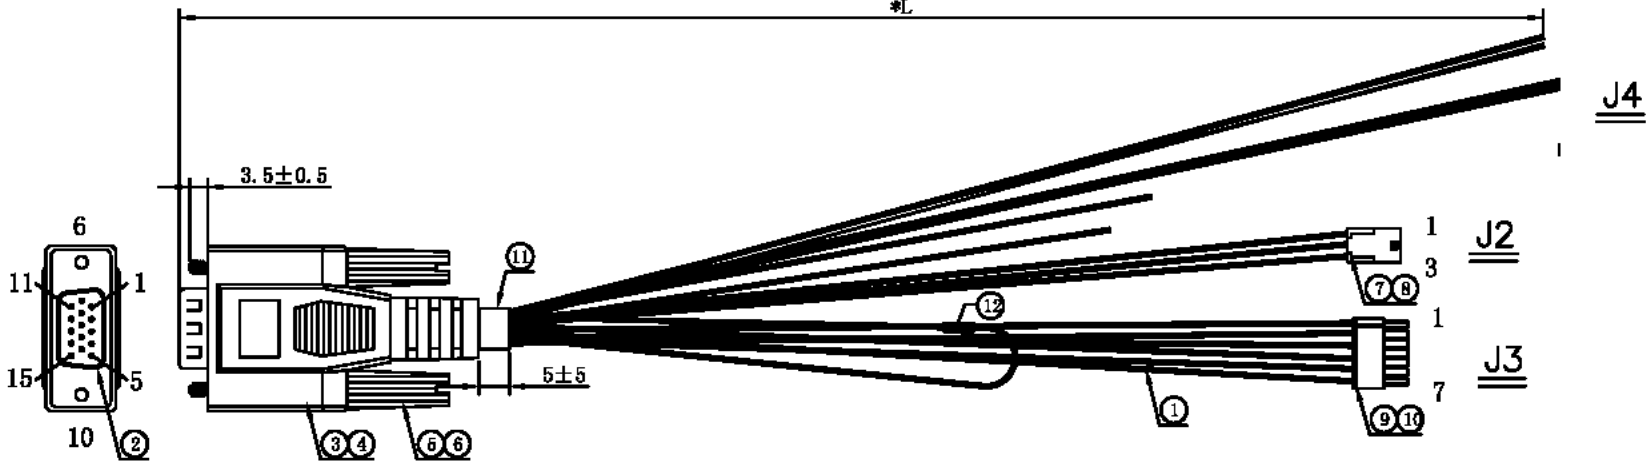

WIRE LIST:

J1	COLOR	J2	J3	J4	*L
1	BLACK	→	→	CUT	2000
		→	→	CUT	2000
		→	3	/	600
		→	3	/	600
		→	→	CUT	900
2	WHITE/ORANGE	→	→	→	450
		→	5	/	600
3	PINK	→	→	CUT	600
5	ORANGE	→	2	/	600
6	BROWN	→	4	/	600
8	YELLOW	→	1	/	600
9	GRAY	→	→	CUT	2000
10	WHITE/BLACK	→	6	/	600
11	GREEN	→	→	CUT	2000
12	RED	→	1	/	600
13	WHITE	→	2	/	600
14	PURPLE	→	→	→	450
15	BLUE	→	7	/	600

SHORT

Note:

NOTE:

1. UNIT: mm
2. TEST:
 - a. EACH CONDUCTOR MUST PASS CONTINUITY TEST AND SHORT, OPEN, INTERMITTENT, MISWIRING SITUATION OCCUR IS NOT PERMITTED.
 - b. THE INSULATION RESISTANCE BETWEEN EACH CONDUCTORS IS 2M OHM MIN
3. WITH RoHS Compliant

12	H.S.TUBE	OD: 2.0 UL BLACK L=20mm	1PC	
11	H.S TUBE	OD: 10.0 UL BLACK L=35mm	1PC	
10	TERMINAL	CUSTOMER P/N: 3030T2-LF	7PCS	CUSTOMER
9	HOUSING	CUSTOMER P/N: 3025-07S	1PC	CUSTOMER
8	TERMINAL	CUSTOMER P/N: 3031T2-LF	3PCS	CUSTOMER
7	HOUSING	CUSTOMER P/N: 3020-03S	1PC	CUSTOMER
6	SCREW MOLD	T-3120 PVC EY-11#(BLACK) 15P		
5	SCREW	#4-40 UNC 4*47mm NICKEL PLATED	2PCS	
4	OUTER MOLD	T-1234 PVC EY-11#(BLACK) 45P		
3	INNER MOLD	T-2235 PE EY-12#		
2	HDB 15M	INSU: BLACK SHELL NICKEL PLATED	1PC	
1	CABLE	UL1569 22AWG WIRE TINED COPPER PVC Rated voltage: 300V, Temperature: 80°C COLOR: LOOK WIRE LIST	Look WIRE LIST	
NO.	DESCRIPTION		Q'TY	REMARK

3RD ANGLE PROJECTION		SIGNATURE	DATE	L.Q.P. Enterprises Co., Ltd.	
TOLERANCES DIM: ±5 ANGLE: 5°		DRAWN BY: 华文强	11-27-06	P/N: CAB 500-ATM	
MATERIAL OF BILL		BDD APPD.	SCALE: 1:1.5	UNIT: MM	REV.: A/0 SHEET 1 OF 1

A

A