




## Output Voltage And Current Rating Chart ( Single Output ) :

Model Number	Output Voltage	Output Current	Total Regulation	Max. Output Power	Pno (max.)
MPU63-102	5 VDC	9.00 A	7%	45W	0.5W
MPU63-103	7 VDC	7.85 A	7%	55W	0.5W
MPU63-104	9 VDC	6.44 A	5%	58W	0.5W
MPU63-105	12 VDC	5.25 A	5%	63W	0.5W
MPU63-106	15 VDC	4.20 A	5%	63W	0.5W
MPU63-107	18 VDC	3.50 A	5%	63W	0.5W
MPU63-108	24 VDC	2.62 A	3%	63W	0.5W
MPU63-109	30 VDC	2.10 A	3%	63W	0.5W
MPU63-110	36 VDC	1.75 A	3%	63W	0.5W

MPU63-102~103 are required to use AWG#16 / 5C / 4FT output cable.  
 MPU63-104~107 are required to use AWG#16 / 2C / 4FT output cable.  
 MPU63-108~110 are required to use AWG#18 / 2C / 6FT output cable.  
 The regulation and efficiency will be changed by modified output cable.


## Mechanical Specifications:

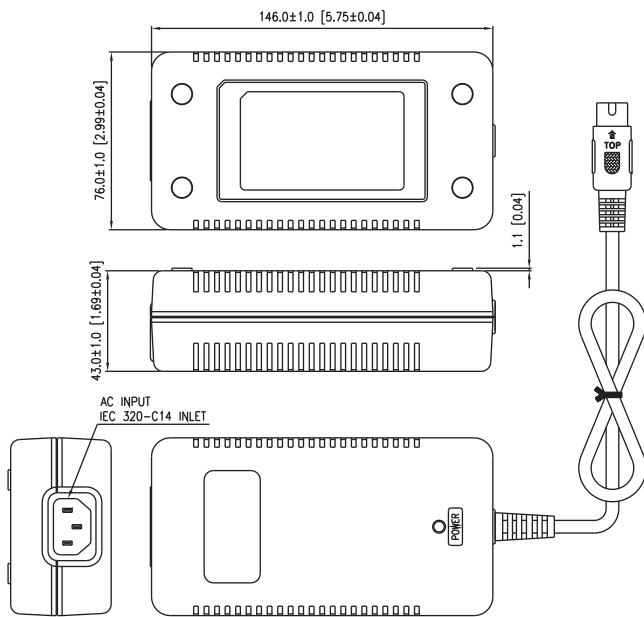

Note:

1. Dimensions are shown in mm.
2. Weight: 510~560gs approx.
3. Optional output connector:  
See page Appendix.

## Derating Curve :

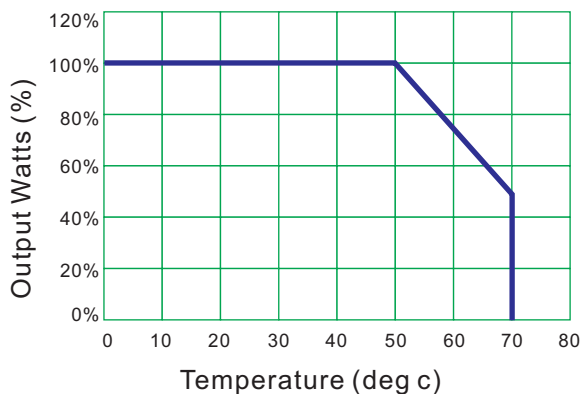

1. Operating Temperature: 0 to 70°C
2. Derate linearly from 100% load at 50°C to 50% load at 70°C

North America Office:  
**L.Q.P. Enterprises Co., LTD.**  
 175-5489 Byrne Road,  
 Burnaby, B.C. V5J 3J1 Canada  
 TEL: (604)451-7899 FAX: (604)451-7858  
 www.LeadingQP.com, www.LQP.ca