

### Features:

- Wide Operating Voltage 90 to 260 VAC, 47 to 63 Hz
- Internal EMI filter
- Single to Triple Output
- Input Surge Current, Over Voltage and Over Load protection
- Output Voltage Protection (Crowbar Design)
- Active Power Factor Correction
- Power Fail Detect (Optional)
- Class I
- 2 year warranty



### Electrical Characteristics:

Vin	Safety Approvals Input Voltage Range		100~240VAC
	Operate Voltage Range		90~260VAC
fin	Input Frequency		47~63Hz
PF	Power Factor Correction	Io=Full load	0.95~1.0
Po	Output Power Range		See rating chart
Vo	Output Voltage Range		See rating chart
Io	Output Current Range		See rating chart
Iil	Input Current (Low Line)	Io=Full load, Vin=100VAC	1.75A
Iih	Input Current (High Line)	Io=Full load, Vin=240VAC	1.0A
Ir	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC	37A (max.)
	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC	75A (max.)
Eff	Efficiency	Io=Full Load, Vin=230VAC	70~85%
REG-i	Line Regulation	Io=Full Load	0.5~1%
REG-o	Load Regulation	Vin=230VAC	2~5%
OVP	Over Voltage Protection		112~132%
OCP	Over Current Protection		110~150%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC	4mS (max.)
Th	Hold-Up Time	Io=Full Load, Vin=110VAC	16mS (min.)
Ts	Start Up Time	Io=Full Load, Vin=100VAC	3S (max.)
Vp-p	Ripple & Noise(Peak to Peak)	Full Load, Vin=90VAC	1% (max.)
Iik	Safety Ground Leakage Current	Vin=240VAC/60Hz	0.75mA (max.)
TC	Temperature Coefficient	All output	±0.04%/°C
Pno	No-Load Power Consumption	No load, Vin=230VAC	See rating chart
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242VDC (min.)
Vpg	Dielectric Withstanding Voltage for Primary to PE	Primary to PE	2719VDC (min.)
Ris	Isolation Resistance	Test Voltage=500VDC	50MΩ (min.)

Note: The Ripple & Noise which is under 3.3VDC at 2% max.

### Environmental

To	Operating Temperature	See derating curve
Ts	Storage Temperature	-40~85°C
Ho	Operating Humidity	0~95%
Hr	Storage Humidity	0~95%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	0.1M Hrs (min.)
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C	

### Application:

- Industrial PC
- Electrical Test & Measurement Instruments
- Communication equipment
- AV equipment

### Safety Approvals:



UL/c-UL(UL 60950-1:2nd Edition)  
TUV/GS(EN 60950-1:2nd Edition)

# SBU120 series

120W Open Frame Type  
I.T.E. Power Supplies

## Output Voltage And Current Rating Chart ( Single Output ) :

Model Number	Output Voltage	Output Current	Total Regulation	Max. Output Power	Pno (max.)
SBU120-101	3 ~ 5 VDC	22.00 ~ 20.00 A	5%	100W	5W
SBU120-102	5 ~ 6 VDC	22.00 ~ 18.33 A	5%	110W	5W
SBU120-103	6 ~ 9 VDC	19.16 ~ 12.77 A	5%	115W	5W
SBU120-104	9 ~ 11 VDC	13.33 ~ 10.90 A	4%	120W	5W
SBU120-105	11 ~ 13 VDC	10.90 ~ 9.23 A	3%	120W	5W
SBU120-106	13 ~ 16 VDC	9.23 ~ 7.50 A	3%	120W	5W
SBU120-107	16 ~ 21 VDC	7.50 ~ 5.71 A	3%	120W	5W
SBU120-108	21 ~ 27 VDC	5.71 ~ 4.44 A	2%	120W	5W
SBU120-109	27 ~ 33 VDC	4.44 ~ 3.63 A	2%	120W	5W
SBU120-110	33 ~ 40 VDC	3.63 ~ 3.00 A	2%	120W	5W
SBU120-111	40 ~ 50 VDC	3.00 ~ 2.40 A	2%	120W	5W

## Output Voltage And Current Rating Chart ( Multi Output ) :


Model Number	Output #1				Output #2				Output #3				Max. Output Power	Pno (max.)
	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax		
SBU120-200	+3.3V	1.5A	15A	5%	+12V	0.6A	6A	5%					120W	5.5W
SBU120-201	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%					120W	5.5W
SBU120-202	+5V	1.5A	15A	5%	+15V	0.6A	6A	5%					120W	5.5W
SBU120-203	+5V	1.5A	15A	5%	+24V	0.4A	3.5A	5%					120W	5.5W
SBU120-204	+3.3V	1.5A	15A	5%	+5V	0.8A	6A	5%					79.5W	5.5W
SBU120-215	+5V	1.5A	15A	5%					-24V	0.2A	2A	5%	120W	5.5W
SBU120-219	+28V	0.4A	3.92A	5%					+5V	0A	2A	5%	120W	5.5W
SBU120-300	+3.3V	1.5A	15A	5%	+12V	0.6A	6A	5%	-12V	0A	0.8A	5%	120W	5.5W
SBU120-300-1	+3.3V	1.5A	15A	5%	+12V	0.6A	6A	5%	+12V	0A	0.8A	5%	120W	5.5W
SBU120-301	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%	-5V	0A	0.8A	5%	120W	5.5W
SBU120-301-1	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%	+5V	0A	0.8A	5%	120W	5.5W
SBU120-302	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%	-12V	0A	0.8A	5%	120W	5.5W
SBU120-302-1	+5V	1.5A	15A	5%	+12V	0.8A	6A	5%	+12V	0A	0.8A	5%	120W	5.5W
SBU120-303	+5V	1.5A	15A	5%	+15V	1.0A	6A	5%	-15V	0A	0.8A	5%	120W	5.5W
SBU120-303-1	+5V	1.5A	15A	5%	+15V	1.0A	6A	5%	+15V	0A	0.8A	5%	120W	5.5W
SBU120-304	+5V	1.5A	15A	5%	+24V	0.45A	3.5A	5%	-24V	0.25A	0.8A	5%	120W	5.5W
SBU120-304-1	+5V	1.5A	15A	5%	+24V	0.45A	3.5A	5%	+24V	0.25A	0.8A	5%	120W	5.5W
SBU120-305	+5V	1.5A	15A	5%	+24V	0.4A	3.5A	5%	-12V	0A	0.8A	5%	120W	5.5W
SBU120-305-1	+5V	1.5A	15A	5%	+24V	0.4A	3.5A	5%	+12V	0A	0.8A	5%	120W	5.5W
SBU120-306	+3.3V	1.5A	15A	5%	+12V	0.8A	6A	5%	-5V	0A	0.8A	5%	120W	5.5W
SBU120-306-1	+3.3V	1.5A	15A	5%	+12V	0.8A	6A	5%	+5V	0A	0.8A	5%	120W	5.5W
SBU120-307	+5V	1.5A	15A	5%	+10V	0.6A	6A	5%	-10V	0A	1.0A	5%	120W	5.5W
SBU120-307-1	+5V	1.5A	15A	5%	+10V	0.6A	6A	5%	+10V	0A	1.0A	5%	120W	5.5W
SBU120-308	+3.3V	1.5A	15A	5%	+5V	0.8A	6A	5%	-12V	0A	1.0A	5%	91.5W	5.5W
SBU120-308-1	+3.3V	1.5A	15A	5%	+5V	0.8A	6A	5%	+12V	0A	1.0A	5%	91.5W	5.5W

## PIN CHART

PIN MODEL	1	2	3	4	5	6	7	8	9	10	11	12	13 (Optional)
SBU120-1XX	OUT	OUT	OUT	OUT	OUT	OUT	RTN	RTN	RTN	RTN	RTN	RTN	PFD
SBU120-219	N/C	N/C	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	Vo3	COM	COM	PFD
SBU120-215	N/C	N/C	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	Vo3	COM	COM	PFD
SBU120-2XX	Vo2	Vo2	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	N/C	COM	COM	PFD
SBU120-3XX	Vo2	Vo2	Vo1	Vo1	Vo1	Vo1	COM	COM	COM	Vo3	COM	COM	PFD

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3


## Mechanical Specifications:

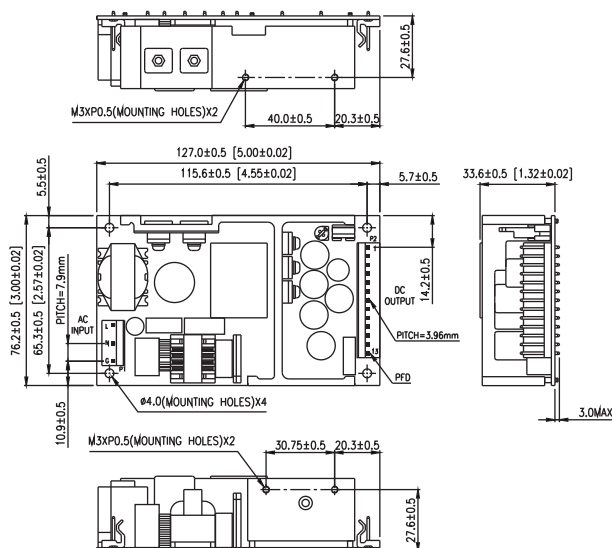

Note:

- Dimensions are shown in inches or mm .
- Weight: 350~428gs approx.
- Input connector mates with Molex housing 09-52-4054 and Molex 2478 series crimp terminal .
- Output connector mates with Molex housing 09-52-4134 and Molex 2478 series crimp terminal.

## Derating Curve :

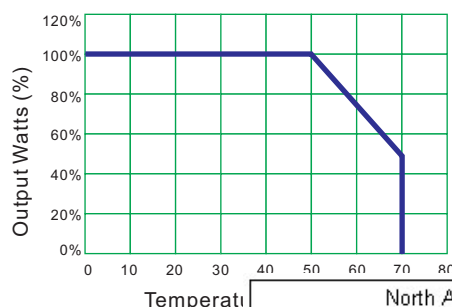

- Operating Temperature: 0 ~ 70°C
- Derate linearly from 100%

North America Office:  
**L.Q.P. Enterprises Co., LTD.**  
175-5489 Byrne Road,  
Burnaby, B.C. V5J 3J1 Canada  
TEL: (604)451-7899 FAX: (604)451-7858  
www.LeadingQP.com, www.LQP.ca