


Features:

- Universal AC Input 90 ~ 264Vac
- Low ripple noise
- No minimum load requirement
- 100% burn in test
- 1 year warranty
- Safety: UL, cUL, GS, CB, CE, FCC



Dimensions:

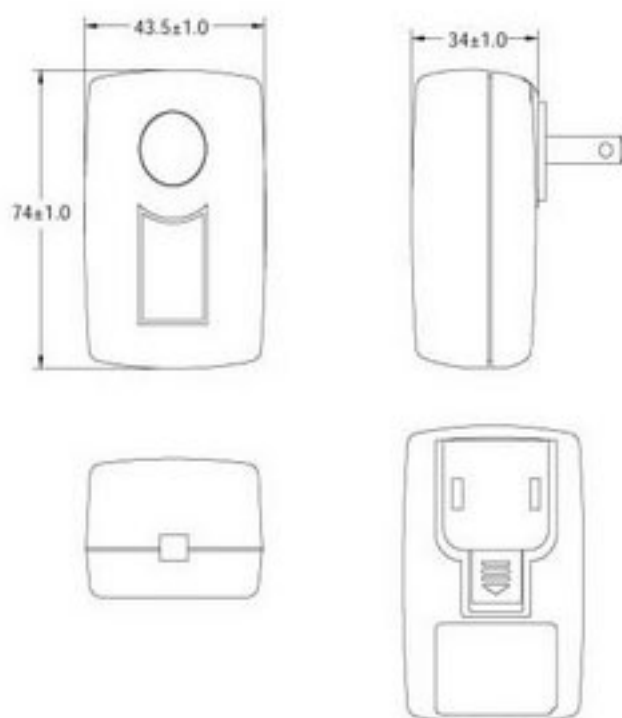

Model No.	Output		Additional Safety
3A-181WP05	5V	3.2A	PSE (IV)
3A-181WP05A	5V	3A	PSE (IV)
3A-181WP06	6V	3A	PSE
3A-181WP07	7V	2.57A	PSE
3A-181WP09	9V	2A	PSE (IV)
3A-181WP12	12V	1.5A	PSE (IV)
3A-181WP15	15V	1.2A	PSE
3A-181WP18	18V	1A	(IV)
3A-181WP20	20V	0.9A	
3A-181WP24	24V	0.75A	(IV)

Specifications:

Input	Voltage	AC 90V ~ 264V Universal full range
	Frequency	47 - 63Hz
	Current	600mA
	Leakage Current	<0.25mA
Others	Start up time	<5 sec @Minimum AC input
	Rise time	<100mS
	Hold up time	> 20mS @ 230Vac/50Hz input
	Cooling	Natural Cooling
Environment	Temperature	Operating: 0-40°C; Storage: -10 ~ +75°C
	Humidity	Operating: 20% ~ 85%; Storage: 10% ~ 95% (Non Converting)
M.T.B.F	50K Hours	
Safety	UL60950-1, CSA C22.2 No.60950-1, EN 60950-1, IEC 60950-1	
EMC	EMI	FCC CFR 47 PART 15
		EN55022, EN61000-3
	EMS	EN 50024 (EN61204-3)
		EN61000-4