

50W Desk Top Switching Power Supplies For I.T.E.

Description:

The SPU45E series of AC/DC switching mode power supplies provide 50 Watts of continuous output power. All supplies are UL 94V-1 min compliant. All models meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL(UL 60950-1:2ndEdition), TUV/GS(EN 60950-1:2ndEdition) and new CE requirements. All units are 100% burned in and tested.



Features:

- Wide Operating Voltage 90 to 264 VAC, 47 to 63 Hz
- IEC-320-C14 Input Inlet
- Single to Triple Output
- Optional Output Connector (See appendix)
- Input Surge Current, Over Voltage And Over Load protection
- Output Voltage Protection(Crowbar Design)
- Splash proof
- Class I
- 1 year warranty

Safety Approvals :



Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Safety Approvals Input Voltage Range		100		240	VAC
	Operate Voltage Range		90		264	VAC
fin	Input Frequency		47		63	Hz
Po	Output Power Range	Vin=90 to 264VAC	0		50	W
Vo	Output Voltage Range		See rating chart			V
Io	Output Current Range		See rating chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC			1.35	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC			0.8	A
Irl	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		12	15	A
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC		26	30	A
Eff	Efficiency	Io=Full Load, Vin=230VAC	70	75	80	%
REG-i	Line Regulation	Io=Full Load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC		3	15	%
OVP	Over Voltage Protection		112		132	%
OCP	Over Current Protection		110		150	%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC			4	mS
Thold	Hold-Up Time	Io=Full Load, Vin=110VAC	10			mS
Ts	Start Up Time	Io=Full Load, Vin=100VAC	0.3	1	2	S
* Vp-p	Ripple & Noise (Peak to Peak)	Full Load, Vin=90VAC		0.5	1	%
Ilk	Safety Ground Leakage Current	Io=Full Load, Vin=240VAC		0.5	0.75	mA
TC	Temperature Coefficient	All output	-0.04		0.04	%/°C

* Note: The Ripple & Noise which is under 3.3VDC at 2% max

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		0	40	70	°C
Tstg	Storage Temperature		-40		85	°C
Ho	Operating Humidity		0		95	%
Hr	Storage Humidity		0		75	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1M			Hrs
Pd	Derate linearly from 100% load at 40°C to 50% load at 70°C					

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242			VDC
Vpg	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2121			VDC
Ris	Isolation Resistance	Test Voltage=500VDC	50			MΩ
CISPR	EMI requirements for CISPR-22	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-15	Vin=110VAC	B			CLASS

SPU45E SERIES

50W Desk Top Switching Power Supplies For I.T.E.

Output Voltage And Current Rating Chart (Single Output) :


Model Number	Output Voltage	Output Current	Total Regulation	Maximum Output Power
SPU45E-100	2 ~ 3 VDC	8.00 A max	7%	24W
SPU45E-101	3 ~ 5 VDC	8.00 A max	5%	40W
* SPU45E-102	5 ~ 6 VDC	8.00 ~ 6.66 A	5%	40W
SPU45E-103	6 ~ 8 VDC	7.00 ~ 5.25 A	5%	42W
SPU45E-104	8 ~ 11 VDC	5.63 ~ 4.00 A	4%	45W
SPU45E-105	11 ~ 13 VDC	4.00 ~ 3.46 A	3%	45W
SPU45E-106	13 ~ 16 VDC	3.46 ~ 2.81 A	3%	45W
* SPU45E-107	16 ~ 21 VDC	3.12 ~ 2.38 A	3%	50W
SPU45E-108	21 ~ 27 VDC	2.30 ~ 1.85 A	2%	50W
SPU45E-109	27 ~ 33 VDC	1.85 ~ 1.51 A	2%	50W
SPU45E-110	33 ~ 40 VDC	1.51 ~ 1.25 A	2%	50W
SPU45E-111	40 ~ 50 VDC	1.25 ~ 1.00 A	2%	50W

Output Voltage And Current Rating Chart (Multi Output) :

Model Number	Output #1				Output #2				Output #3				Maximum Output Power
	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	
SPU45E-200	+3.3V	0.7A	5A	7%	+12V	0.4A	2A	5%					40W
SPU45E-201	+5V	0.5A	5A	5%	+12V	0.3A	2A	5%					42W
SPU45E-202	+5V	0.8A	5A	5%	+15V	0.3A	1.5A	6%					42W
SPU45E-203	+5V	0.5A	5A	5%	+24V	0.2A	1A	5%					42W
SPU45E-204	+3.3V	0.8A	5A	7%	+5V	0.4A	2A	5%					26.5W
* SPU45E-209	+12V	0.3A	3A	5%					-12V	0A	1A	10%	42W
SPU45E-210	+15V	0.5A	2A	5%					-15V	0.3A	1A	10%	42W
SPU45E-215	+5V	0.5A	5A	5%					-24V	0.1A	1A	10%	42W
SPU45E-216	+5.1V	0A	1A	5%					+7.2V	0.2A	2.6A	5%	23.82W
SPU45E-300	+3.3V	1.0A	5A	7%	+12V	0.3A	2A	5%	-12V	0.15A	0.8A	10%	42W
SPU45E-301	+5V	0.5A	5A	5%	+12V	0.8A	2A	5%	-5V	0.16A	0.8A	10%	42W
SPU45E-302	+5V	0.6A	5A	5%	+12V	0.45A	2A	5%	-12V	0.2A	0.8A	10%	42W
SPU45E-303	+5V	0.5A	5A	5%	+15V	0.3A	2A	6%	-15V	0.16A	0.8A	10%	42W
SPU45E-304	+5V	0.5A	5A	5%	+24V	0.1A	1A	5%	-24V	0.10A	0.5A	10%	42W
SPU45E-305	+5V	0.5A	5A	5%	+24V	0.1A	1A	5%	-12V	0.16A	0.8A	10%	42W
SPU45E-306	+3.3V	0.5A	5A	7%	+12V	0.2A	2A	5%	-5V	0.16A	0.8A	10%	42W

Mark " * " means " PSE approval "

Mechanical Specifications:

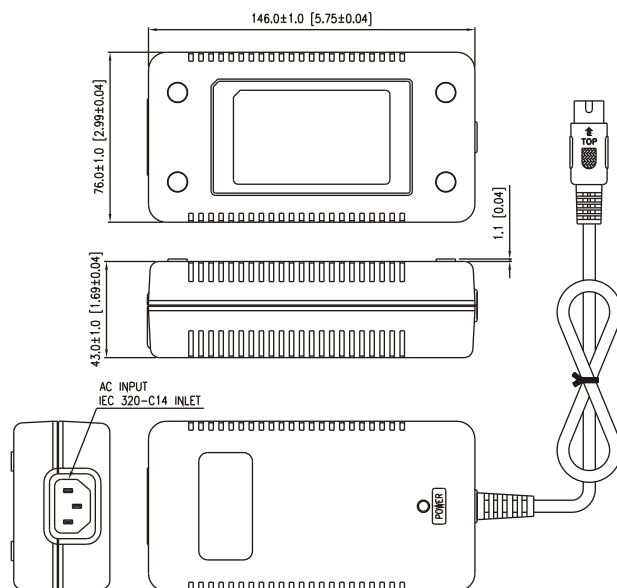

Note:

1. Dimensions are shown in inches or mm.
2. Weight: 535-560gs approx.
3. Optional output connector:
See page Appendix.

North America Office:
L.Q.P. Enterprises Co., LTD.
 175-5489 Byrne Road,
 Burnaby, B.C. V5J 3J1 Canada
 TEL: (604)451-7899 FAX: (604)451-7858
 www.LeadingQP.com, www.LQP.ca