



40W Series Desktop Switching Power Supply



Input Connector



IEC-320-C14

Model	Input	Output
	AC90V~264V	5V/2.5A-4.0A
		6V/2.5A-4A
		7.5V/2.5A-4A
		8V/2.5A-3.5A
		9V/2.5A-3.5A
		10V/2.0A-3.5A
		12V/2.0A-3.2A
		14.5V/1.5A-2.8A
		15V/1.5A-2.8A
		16V/1.5A-2.5A
		17V/1.5A-2.5A
		18V/1.5A-2.5A
		19V/1.0A-2.3A
		21V/1.0A-2.1A
24V/0.8A-1.8A		

Safety


UL/CUL, GS, CE, CB, FCC

Input /Output Specification

ITEM	SPECIFICATION	MIN	TYP.	MAX
Input Voltage	Single Phase (Unit: VAC)	100		240
Input Voltage Range	Single Phase (Unit: VAC)	90		264
Input Frequency	Single Phase (Unit: Hz)	47	50/60	63
Input Current	Typical Input Voltage & Output at Full Road (Unit: mA)			350
Ac Inrush Current	Typical Input Voltage & Output at Full Road, 25°C			30A

Efficiency	Typical Input Voltage & Output at Full Road	82%		
Output Power	40W			
Output Voltage	12V			
Over Voltage Protection	120%min			
Over Current Protection	120%min			
Short Protection	Auto Recovery			
Load Regulation	±5%			

General Specification	
Operating Temp	0°C~40°C
Storage Temp	-20°~85°C
Operating Relative Humidity	5~95%RH
WithStanding Voltage	AC 3000V(Min), 5mA(Max)
Insulation Resistance	DC 500V 100MΩ(Min)

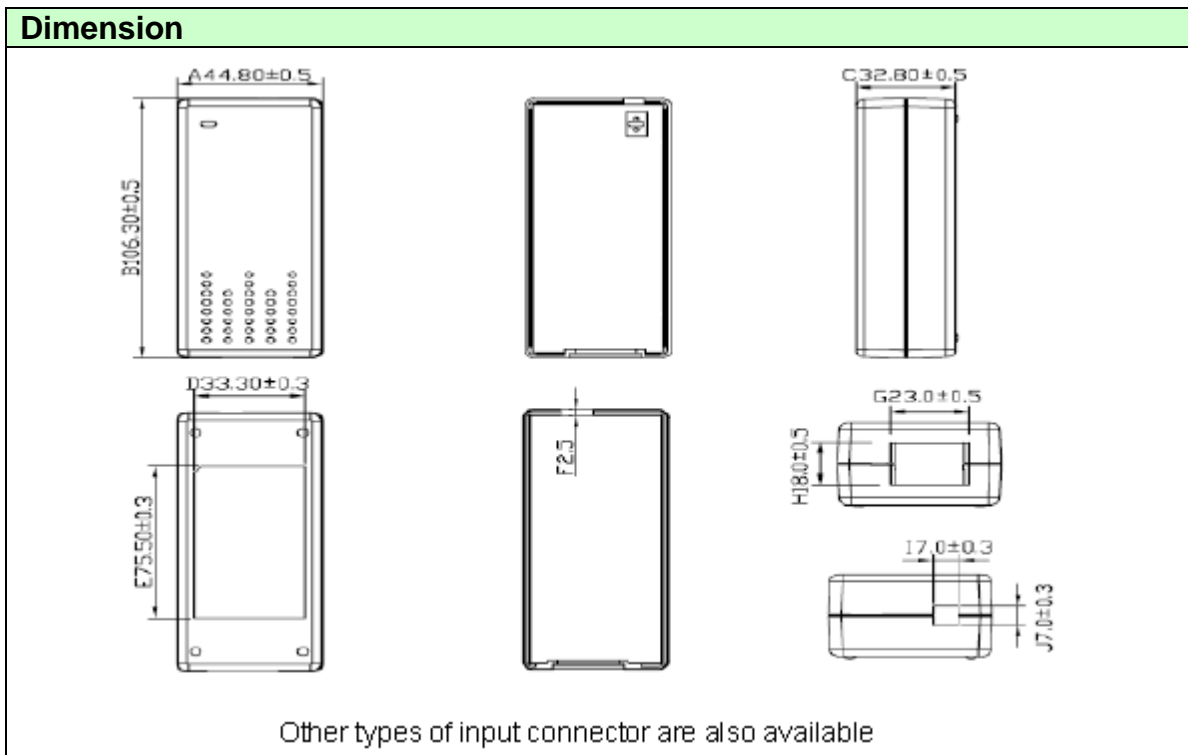

North America Office:
L.Q.P. Enterprises Co., LTD.
 175-5489 Byrne Road,
 Burnaby, B.C. V5J 3J1 Canada
 TEL: (604)451-7899 FAX: (604)451-7858
www.LeadingQP.com, www.LQP.ca