

### Features:

- Wide Operating Voltage 90 to 260 VAC, 47 to 63 Hz
- IEC-320-C14 Input Inlet
- Over Voltage Protection (Crowbar Design)
- Active Power Factor Correction
- Single Output
- Energy Star 2.0, Efficiency level V
- Class I
- 2 year warranty



### Electrical Characteristics:

Vin	Safety Approvals Input Voltage Range		100~240VAC
	Operate Voltage Range		90~260VAC
fin	Input Frequency		47~63Hz
PF	Power Factor Correction	Io=Full load, Vin=240VAC	0.95~1
Po	Output Power Range		See rating chart
Vo	Output Voltage Range		See rating chart
Io	Output Current Range		See rating chart
Iil	Input Current (Low Line)	Io=Full load, Vin=100VAC	1.07A (max.)
Iih	Input Current (High Line)	Io=Full load, Vin=240VAC	0.60A (max.)
Ir	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC	45A (max.)
	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC	92A (max.)
Eff	Efficiency	Io=Full Load, Vin=230VAC	82~92%
REG-i	Line Regulation	Io=Full Load	0.5~1%
REG-o	Load Regulation	Vin=230VAC	5%
OVP	Over Voltage Protection		112~132%
OCP	Over Current Protection		110~150%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC	4mS (max.)
Th	Hold-Up Time	Io=Full Load, Vin=110VAC	16mS (min.)
Ts	Start Up Time	Io=Full Load, Vin=100VAC	2S (max.)
Vp-p	Ripple & Noise(Peak to Peak)	Full Load, Vin=90VAC	1% (max.)
Ilk	Safety Ground Leakage Current	Vin=240VAC/60Hz	0.75mA (max.)
TC	Temperature Coefficient	All output	±0.04%/°C
Pno	No-Load Power Consumption	No load, Vin=230VAC	See rating chart
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242VDC (min.)
Vpg	Dielectric Withstanding Voltage for Primary to PE	Primary to PE	2989VDC (min.)
Ris	Isolation Resistance	Test Voltage=500VDC	50MΩ (min.)

### Application:

- POS System
- AV Equipment
- Industrial PC
- Note PC
- Charger
- LED Lighting

### Safety Approvals:



UL/c-UL(UL 60950-1:2nd Edition)  
TUV/GS(EN 60950-1:2nd Edition)

The SPU80-108 ,  
SPU80-110 are  
available on KC mark  
(Korea Certification).

### Environmental

To	Operating Temperature	See derating curve
Ts	Storage Temperature	-40~85°C
Ho	Operating Humidity	0~95%
Hr	Storage Humidity	0~95%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F	0.1M Hrs (min.)
Pd	Derate linearly from 100% load at 40°C to 50% load at 70°C	

## Output Voltage And Current Rating Chart ( Single Output ) :

Model Number	Output Voltage	Output Current	Total Regulation	Max. Output Power	Pno (max.)
SPU80-105	11 ~ 13 VDC	7.27 ~ 6.15 A	5%	80W	0.5W
SPU80-106	13 ~ 16 VDC	6.15 ~ 5.00 A	5%	80W	0.5W
SPU80-107	16 ~ 21 VDC	5.00 ~ 3.80 A	5%	80W	0.5W
SPU80-108	21 ~ 27 VDC	3.80 ~ 2.96 A	5%	80W	0.5W
SPU80-109	27 ~ 33 VDC	2.96 ~ 2.42 A	5%	80W	0.5W
SPU80-110	33 ~ 40 VDC	2.42 ~ 2.00 A	5%	80W	0.5W
SPU80-111	40 ~ 48 VDC	2.00 ~ 1.66 A	5%	80W	0.5W

SPU80-105 is required to use AWG#18×3C+ AWG#20×2C/ 4FT output cable.

SPU80-106 is required to use AWG#16×2C/ 4FT output cable.


SPU80-107 is required to use AWG#16×2C/ 6FT output cable.

SPU80-108~109 are required to use AWG#18×2C/ 6FT output cable.

SPU80-110~111 are required to use AWG#20×2C/ 6FT output cable.

The regulation and efficiency will be changed by modified output cable.


## Mechanical Specifications:

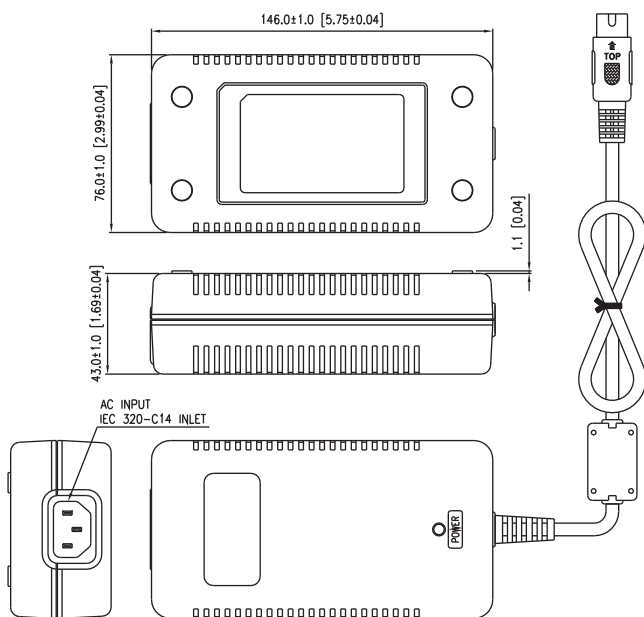

### Note:

1. Dimensions are shown in mm.
2. Weight: 600~700gs approx.
3. Optional output connector:  
See page Appendix.

## Derating Curve :

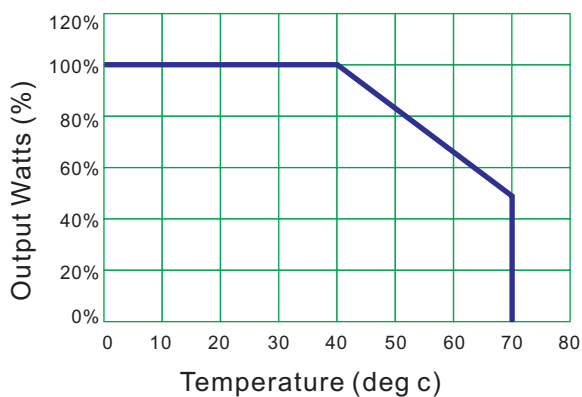

1. Operating Temperature: 0 to 70°C
2. Derate linearly from 100% load at 40°C to 50% load at 70°C

North America Office:  
**L.Q.P. Enterprises Co., LTD.**  
175-5489 Byrne Road,  
Burnaby, B.C. V5J 3J1 Canada  
TEL: (604)451-7899 FAX: (604)451-7858  
www.LeadingQP.com, www.LQP.ca